RESEARCH PROTOTYPE · SYNTHETIC DATA

Early Detection of Alzheimer's from MRI and Handwriting

Design and analysis of an explainable multimodal prototype

MS Malhar Srivatsav

SB Sathwik Hejamady Bhat

HR Harit Raval

SJ Shreya Jain

TP Taneesha Rajiv Prasad

NH Nithyashree Hebbar

AG Arshi Garg

Early detection needs evidence you can check

NC Normal cognition › EMCI Early MCI › LMCI Late MCI › AD Alzheimer's

THREE PROBLEMS

1. Early MRI changes are subtle
2. A bare label gives a clinician nothing to check
3. Records have gaps, and healthy cases dominate

OUR ANSWER

Stage classifier
VGG19, four ordered stages

Explanation
Grad-CAM map + attention audit

Data pipeline
Hot-deck imputation, ADASYN

Second signal
Spiral handwriting kinematics

One app, two signals, every answer explained

Browser

MRI tab · handwriting canvas · results

FastAPI service

size limits · validation · typed errors · /health

MRI predictor

VGG19 · probabilities · Grad-CAM

Handwriting analyzer


9 features · logistic regression

Checkpoint

best_model.pt · 132 MB

Saved model


trains itself in about 6 s

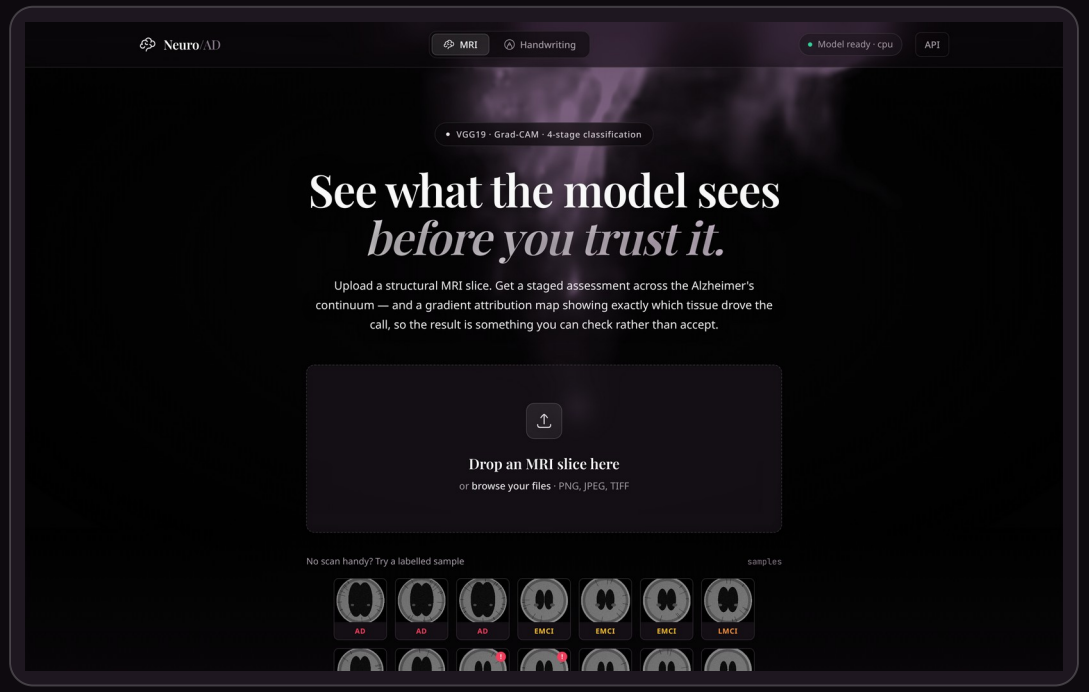

The running prototype: upload a slice or click a labelled sample

All data are synthetic: scores describe the pipeline, not patients


Why we generate our own data

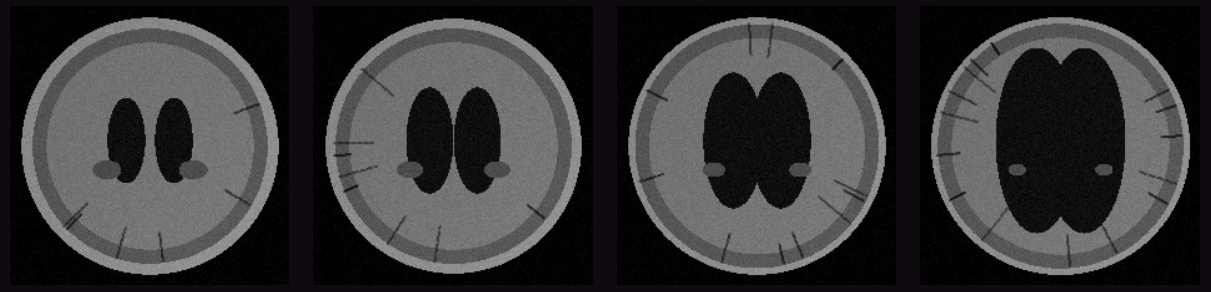

NC EMCI LMCI AD


- ADNI access takes weeks: a generator lets the whole pipeline run today
- As the stage advances: ventricles larger, cortex thinner, hippocampus smaller
- Clinical table of 7 measures; gaps rise with stage, CSF amyloid most often missing

3.2 : 1 class imbalance in the 285-slice cohort

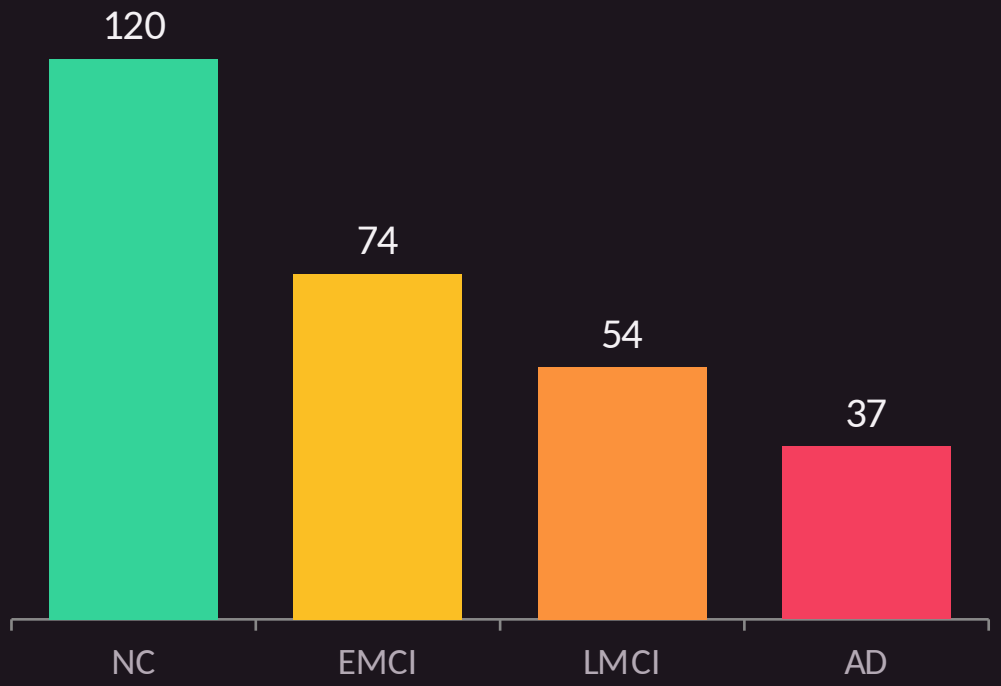

Hot-deck kept the spread; ADASYN did not help


Imputed variance ÷ true variance (ideal: 1.0)

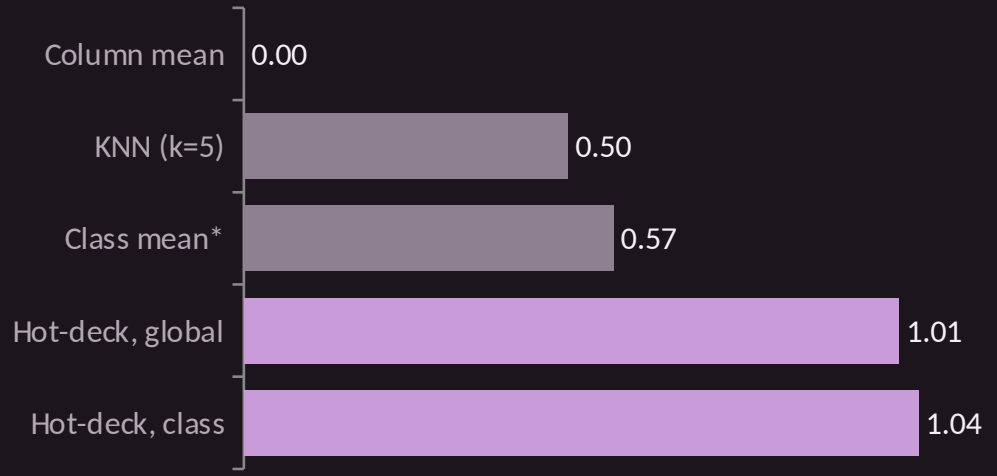

Mean imputation: variance 0 and AD hippocampal volume 1.47 sd too large. **Hot-deck:** variance ≈ 1.0, bias −0.05 sd, at the cost of noisier single guesses.

* Class mean uses the true label, so it is only a reference.

Downstream macro F1, 30 splits

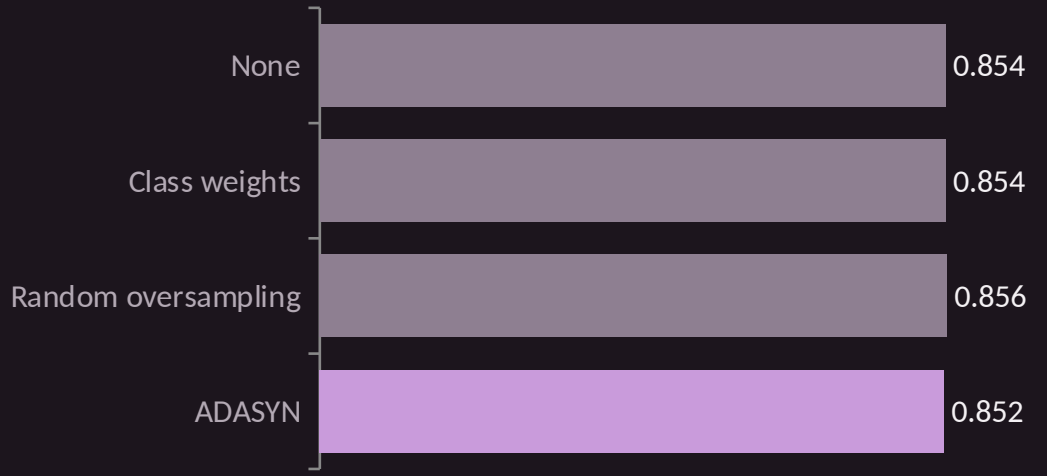

ADASYN balances exactly (+455 synthetic rows, 3.26 → 1.00) but macro F1 moves **-0.002 ± 0.015**, ahead in 14 of 30 splits: no measurable gain.

THE MRI MODEL

A pretrained VGG19, fine-tuned where it matters

Input
224 × 224 MRI slice

›

Conv blocks 1–4
Frozen · ImageNet filters

›

Conv block 5
Fine-tuned on MRI

›

New head
25088 → 512 → 256 → 4 · dropout

›

Output
4 stage probabilities

33.0 M
parameters in total

22.4 M
trainable: block 5 + new head

4
ordered stages: NC < EMCI < LMCI < AD

A small detail that matters: in-place ReLUs are replaced with normal ones, because in-place layers overwrite the activations that Grad-CAM must read.

How it was trained, and what we evaluated

TRAINING RECIPE

- AdamW: backbone 1e-4, new head ten times higher
- Label smoothing 0.05, inverse-frequency class weights
- Cosine decay, up to 25 epochs, early stopping (patience 6)
- Checkpoint chosen by validation macro F1, not accuracy
- Mild augmentation: flip, 7° rotation, 3% shift, 10% jitter

Epoch 1

selected checkpoint

1.000

validation macro F1

⚠ **Validation is saturated.** A perfect score at epoch 1 on 43 slices means model selection carried almost no information.

We did not retrain. Every result that follows comes from running the released checkpoint.

Reproduced exactly, then tested on fresh data

REPRODUCED


95.35%

43-slice test split · macro F1 0.9653 · kappa 0.9783 · confusion matrix identical to the documentation

FRESH, UNSEEN COHORTS

97.8%

1,065 slices from 3 new seeds · macro F1 0.978 (95% CI 0.968–0.986)

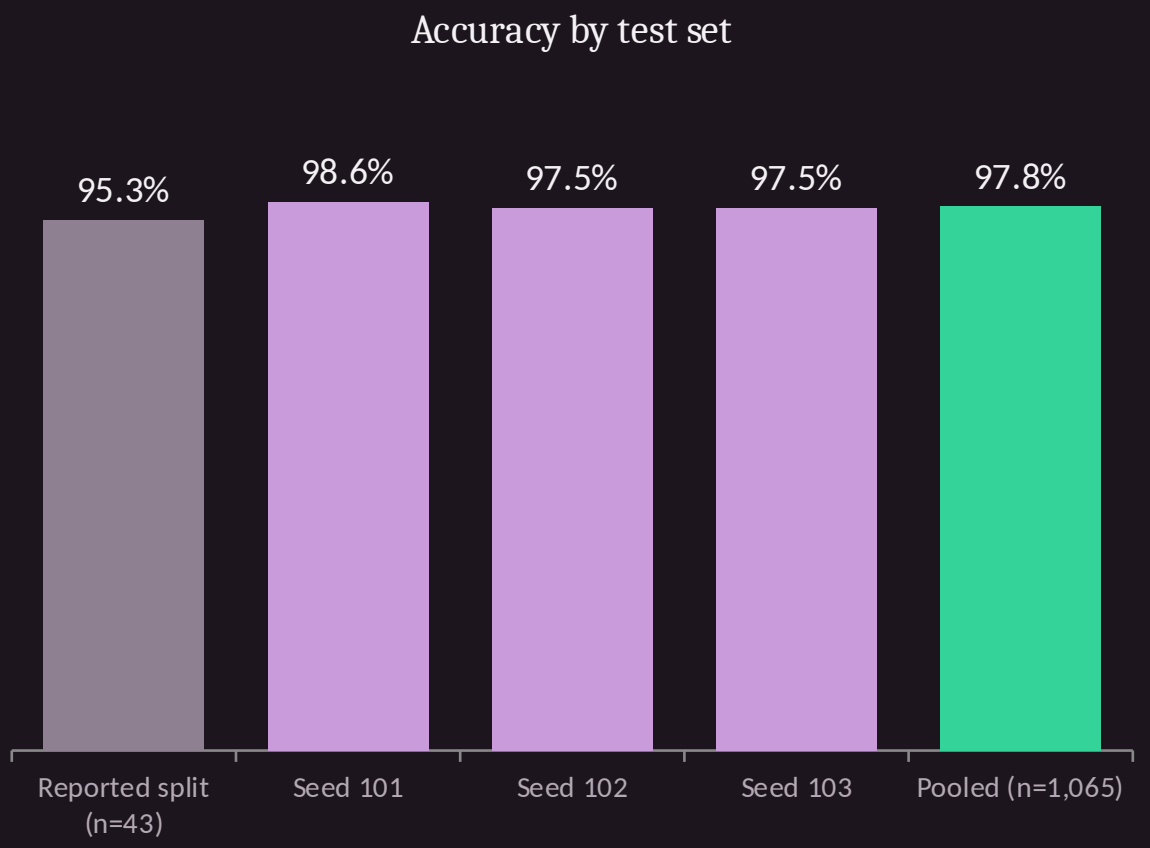

Every error is between neighbouring stages

Pooled confusion matrix · rows are the true stage

True \ Pred	NC	EMCI	LMCI	AD
NC	447	3	0	0
EMCI	5	257	14	0
LMCI	0	0	201	0
AD	0	0	1	137

14 early-MCI slices read as late MCI · 5 as normal · 3 normal as early MCI · 1 AD as late MCI

Recall by stage




0.992
early-detection recall


23
errors, all adjacent

98.6 vs 91.8
accuracy vs mean confidence (%)

Explanations you can check, not just trust

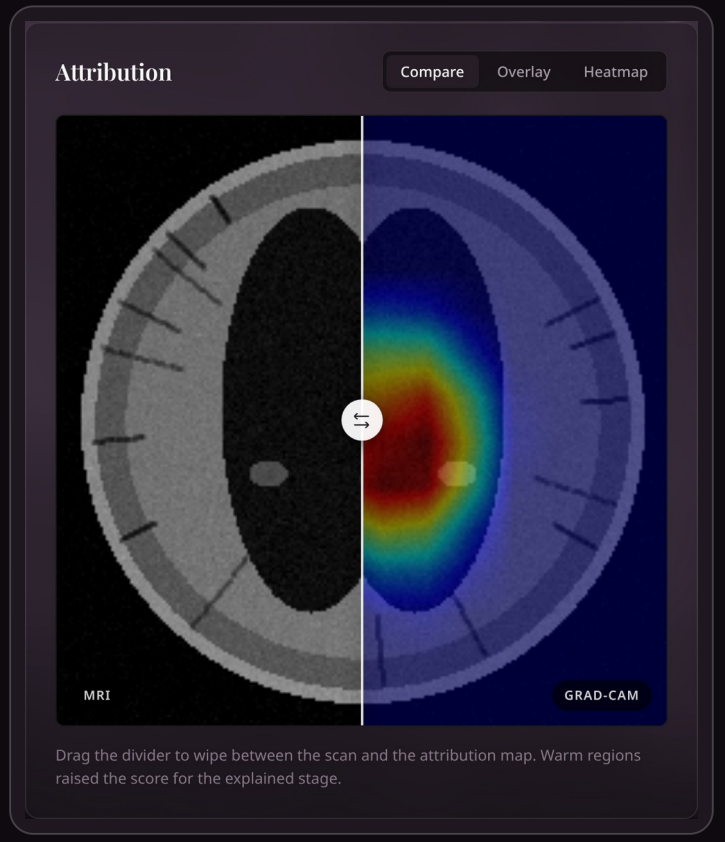

Drag to compare: scan vs map

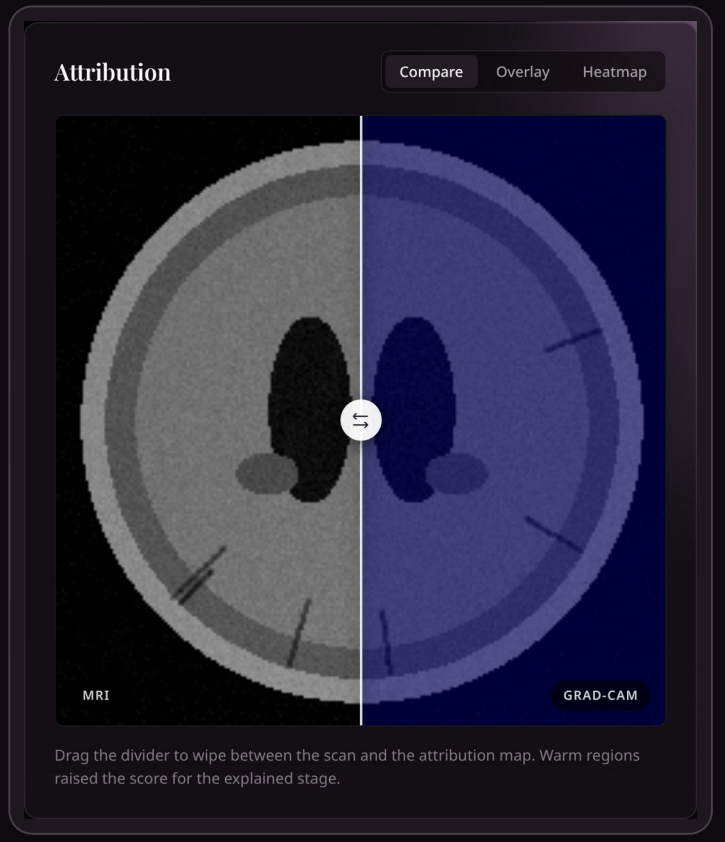

Counterfactual: “what would make this AD?”

1 **Weight** Gradient of the stage score weights the last conv feature maps

2 **Map** Weighted sum + ReLU: warm regions pushed the score up

3 **Audit** Central share of the map below 40% flags the prediction

0 of 710 maps flagged

Clean-data scores do not survive degraded images




0.987 → 0.648

macro F1 with Gaussian noise σ = 0.10


≈ 0.89

early-detection recall under brightness or contrast shifts: impaired read as normal

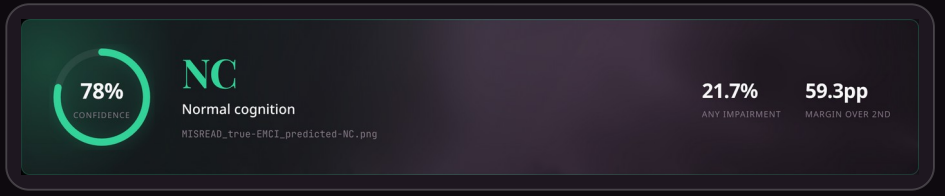

A real miss from the prototype: true EMCI read as NC

Handwriting: the pen's motion, not the picture

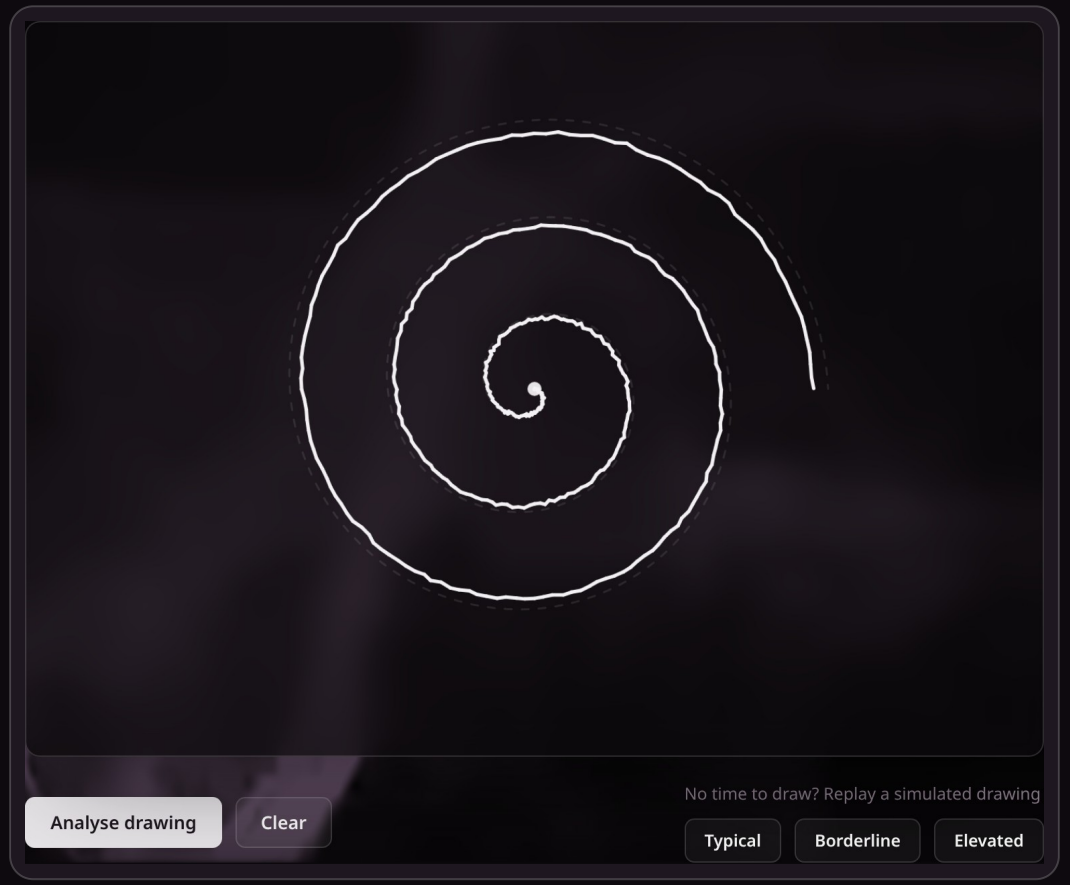

A live drawing: every pen point is stored with its timestamp

NINE MEASUREMENTS FROM (x, y, t)

Drawing time seconds	**Mean pen speed** path per second	**Speed variability** stop-start motion
Stalled time hesitation	**Pen-up time** pen lifted	**Speed peaks** fluency
Tremor 4–12 Hz wobble	**Spiral irregularity** radial residual	**Drawing size** micrographia

Lengths are relative to the canvas diagonal, so screen size does not matter. A mouse or finger gives no pressure.

An interpretable score, with one big caveat

Pen speed along the drawing



slow — fast

Dim stretches of the line are slow; bright stretches are fast. Stalls, stop-start motion and uneven pace show up as abrupt colour changes.

What moved the score

● raises indicator ● lowers it

Speed variability	0.63	Spread of pen speed relative to its mean. Uneven, stop-start motion raises it.
Spiral irregularity	7.13 %	How far the radius wobbles around a smooth spiral, relative to the mean radius.
Tremor amplitude	2.06 ‰ diag	RMS of 4-12 Hz oscillation in pen position, in thousandths of the diagonal.
Drawing size	39.5 % of canvas	Extent of the drawing relative to the canvas. Shrinking size is micrographia-like.
Speed peaks	8.71 per diag	Velocity peaks per canvas-diagonal of path. A fluent stroke has few; hesitant ones have many.
Stalled time	11.7 %	Share of pen-down time spent nearly stationary (hesitation).
Drawing time	13.8 s	Total time from first to last touch. Slowed psychomotor speed lengthens it.
Pen-up time	15.4 %	Share of the whole task spent with the pen lifted. Longer in-air time is a reported marker.
Mean pen speed	0.20 diag/s	Path length per second of pen contact, as a fraction of the canvas diagonal.


0.962

AUC · 600 held-out drawings

89.3%


accuracy at threshold 0.5

Accuracy as coordinate noise grows

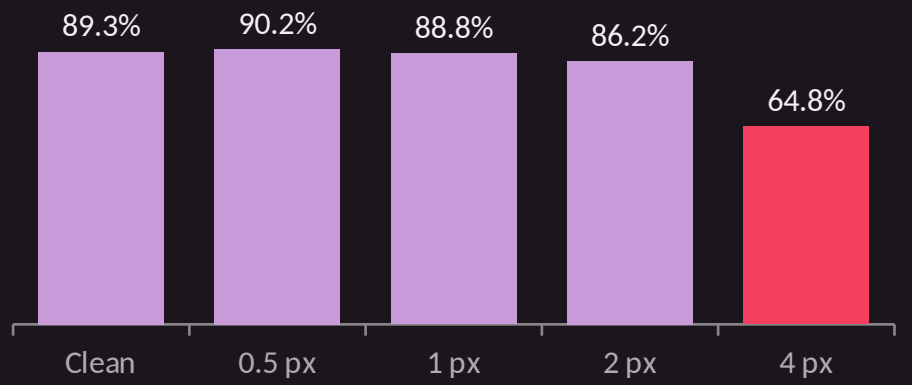

Trained on simulated drawings: it learned our assumptions


Responsive on four CPU cores, with one bottleneck

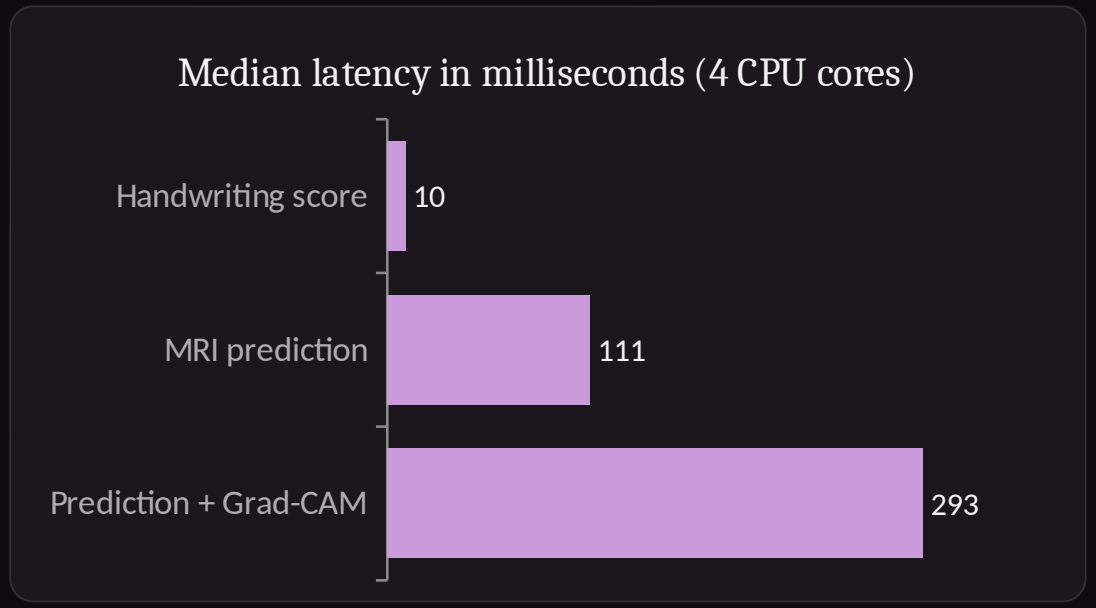

9.4
predictions / s per worker

3.6
explanations / s per worker

11.6 s
cold start to ready

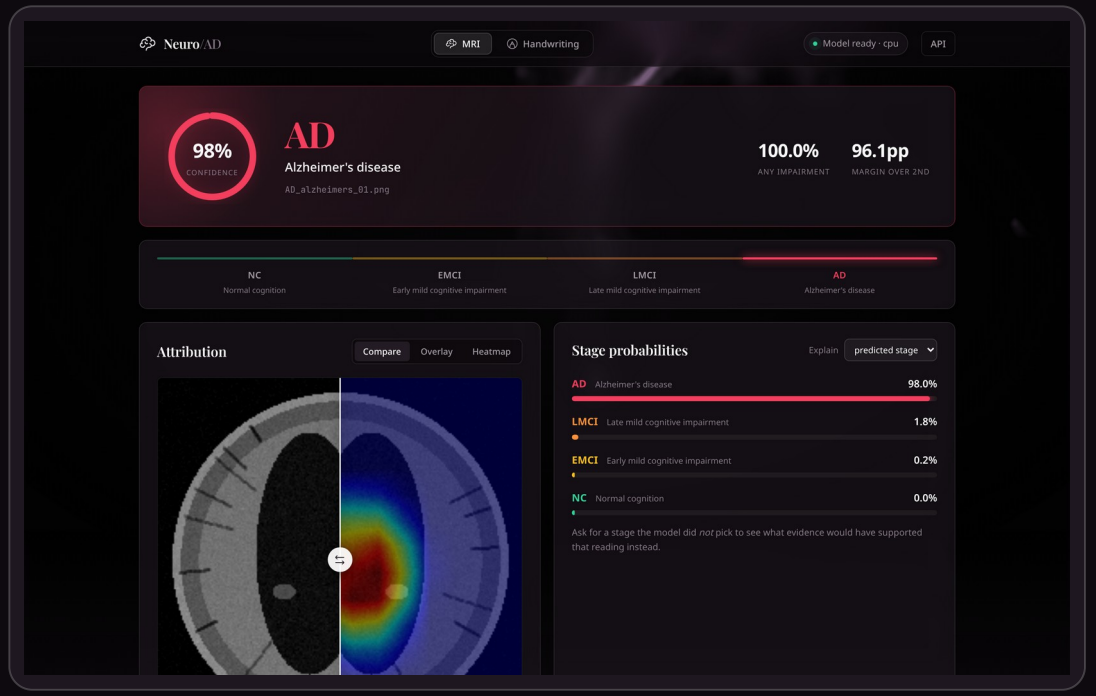

The finished interface (real screenshot)

Bottleneck: more clients do not add throughput; each request runs a blocking forward pass in one worker.

What we can claim, and what comes next

WHAT WE CAN CLAIM

- Works end to end and reproduces exactly
- Handwriting explanation is exact; MRI map is checkable
- Fast enough to demo on a laptop

WHAT WE CANNOT CLAIM

- Clinical performance: all data are synthetic
- Robustness: noise and blur break it
- A trained multimodal model: the combined score is an average

NEXT STEPS, IN ORDER

1. Real data (ADNI, DARWIN) with subject-level splits
2. Calibration and thresholds for the cost of a miss
3. Robustness training: noise, blur, compression
4. Faithfulness tests for the explanations
5. A learned fusion once paired data exists
6. Engineering: browser tests, CI, pinned versions

Thank you

Questions, and a live demo

Malhar Srivatsav

Sathwik Hejamady Bhat

Harit Raval

Shreya Jain

Taneesha Rajiv Prasad

Nithyashree Hebbar

Arshi Garg

Research prototype · not a medical device · all data synthetic

github.com/ByteSizedMe/alzheimers-early-detection

Early Detection of Alzheimer's Disease from MRI and Handwriting: Design and Analysis of an Explainable Multimodal Prototype

Malhar Srivatsav, Sathwik Hejamady Bhat,
Harit Raval, Shreya Jain,
Taneesha Rajiv Prasad, Nithyashree Hebbar,
Arshi Garg

***Abstract*—This report documents an explainable prototype for the early detection of Alzheimer's disease and evaluates its latest revision. The system classifies a two-dimensional MRI slice into four ordered stages (normal cognition, early and late mild cognitive impairment, and Alzheimer's disease) with a fine-tuned VGG19 network, and it explains each prediction with a Grad-CAM attribution map and an automatic check of where that map falls. A second module scores a spiral drawing captured in the browser from the timestamped pen trace, using nine kinematic features and a logistic regression whose output decomposes exactly into per-feature contributions. Clinical records are completed with hot-deck imputation and balanced with ADASYN. Everything is served by a FastAPI application and a single-page interface. All data in this work are synthetic: the MRI slices are generated phantoms and the drawings are simulated, so every accuracy figure describes the pipeline and the generator and not patients. Executing the released checkpoint reproduces the reported test split exactly (43 slices, accuracy 0.9535, macro F1 0.9653) and reaches accuracy 0.978 and macro F1 0.978 on 1,065 slices from three freshly generated cohorts, with expected calibration error 0.060. The handwriting classifier reaches AUC 0.962 on 600 held-out drawings, and its ranking, but not its decision threshold, survives heavy coordinate noise. Hot-deck imputation preserves variance where mean imputation removes it, whereas ADASYN gives no measurable downstream gain on the synthetic table. Median CPU latency is 111 ms for a prediction and 293 ms for a prediction with explanation. The report separates measured results from derived quantities and from claims it does not make, and it lists the steps required before any clinical interpretation.**

***Index Terms*—Alzheimer's disease, MRI classification, Grad-CAM, transfer learning, handwriting analysis, hot-deck imputation, ADASYN, FastAPI.**

I. Introduction

This report documents and evaluates the explainable early-detection prototype in [1]. Alzheimer's disease advances through recognizable stages, from normal cognition through early and late mild cognitive impairment to dementia, and the Alzheimer's Disease Neuroimaging Initiative organizes its data around that progression [2]. Structural MRI shows the change as enlarged ventricles, thinner cortex, and a shrinking hippocampus, but early differences are subtle, and a network that reports only a label gives a reviewer nothing to check. The prototype pairs a stage classifier with an attribution map that shows where the evidence lies and adds handwriting as a second, inexpensive signal.

The central requirement is that every reported number stay attributable to what it measures. The repository contains no ADNI images or handwriting recordings: its MRI slices are phantoms drawn by a generator and its drawings come from a simulator. A high score on such data shows that the pipeline is connected correctly and that the generator is separable, not that the model detects disease. This report therefore separates measurements produced by executing the repository, quantities derived from code and constants, and claims it does not make.

The report has four objectives. First, it describes the system precisely enough to reproduce it. Second, it reproduces the figures reported by the repository authors and measures the released checkpoint on unseen cohorts, including calibration, robustness, explanation focus, and latency. Third, it isolates the contribution of the imputation and balancing stages and of the handwriting features. Fourth, it states the limits of the evidence and orders the work needed before any clinical interpretation.

II. Background and Design Context

A. Staging Task and Ordinal Structure

The four classes are ordered: NC $<$ EMCI $<$ LMCI $<$ AD. Calling an Alzheimer's case normal is a more serious error than confusing the two mild stages, so accuracy alone is a weak headline metric, particularly when about 42% of a cohort is normal. The implementation therefore reports macro F1, balanced accuracy, quadratic-weighted kappa [3], and the fraction of impaired cases that are not called normal (Section IX).

B. Transfer Learning and Explanation

VGG19 [4] pretrained on ImageNet [5] supplies the backbone. With a few hundred training slices there is no prospect of fitting its 143 million ImageNet-head parameters from scratch, but the early filters already respond to the edges and textures that ventricular enlargement and cortical thinning produce. VGG is also convenient for explanation: Grad-CAM [6] needs only the activations and gradients of a late convolutional layer, and VGG19 exposes one without architectural change.

C. Handwriting as a Second Signal

Kinematic studies of handwriting report group differences between healthy controls, people with mild cognitive impairment, and people with mild Alzheimer's disease. In one such study, temporal measures grew and pen pressure fell with greater decline, and kinematic plus cognitive variables classified 69% to 72% of participants correctly, with the intermediate group classified least well [7]. The DARWIN dataset provides 174 participants (89 with Alzheimer's disease and 85 healthy) who each performed 25 tasks on a graphic tablet [8]. These sources motivate the choice of measurements; they do not validate the specific features or thresholds used here, and no recording from either source was used.

D. Missing Data and Imbalance

Clinical tables are incomplete, and here the missingness rises with stage, so deleting incomplete rows would remove the most impaired subjects first. Hot-deck imputation fills each gap with an observed value from a similar complete record [9], and ADASYN generates synthetic minority samples with emphasis on difficult neighbourhoods [10]. Both act on tabular records and never on images, because interpolating between two MRI slices produces anatomy that does not exist.

E. System Requirements

The functional requirements are image upload and four-stage classification, an explanation for each result, imputation and balancing of clinical records, capture and scoring of a spiral drawing, and a browser interface that needs no command-line interaction. The quality requirements are reproducibility, honest reporting of what the data can support, bounded request sizes, and graceful behaviour when no model is available. The repository meets these in part. It has request-size limits, typed error responses, and a health endpoint that reports whether a checkpoint is loaded. It has no authentication, persistent storage, audit log, or subject-level data handling, and these are absent capabilities and not defects of the implemented ones.

III. System Architecture

A. Layered Organization

Figure 1 summarizes the request path. The browser submits an image or a timestamped stroke list to a FastAPI application. The application validates sizes and content, then calls the MRI predictor or the handwriting analyzer. Both return structured results, and the interface renders them together with the explanation. The training and data-preparation stages run offline from command-line modules and are connected to serving only through the checkpoint file.

B. Component Responsibilities

`data/imputation.py` implements the hot-deck imputer, and `data/balancing.py` implements ADASYN directly on `sklearn.neighbors`, so the project carries no resampling dependency. `data/datasets.py` builds manifests, stratified splits, transforms, and class weights.

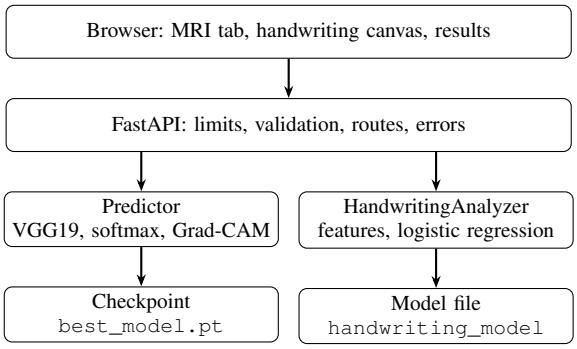


Fig. 1. Logical layers of the prototype. The two modalities are served by separate analyzers behind one API. The only coupling between them is an illustrative average computed in the browser (Section VIII-B).

`models/vgg19.py` constructs the network and its checkpoint format, and `models/gradcam.py` computes the attribution map and its focus summary. `training/` contains the training loop and the ordinal-aware metrics. `inference.py` defines the `Predictor` shared by the API and the optional Streamlit dashboard, so the two surfaces cannot disagree. `handwriting/` contains feature extraction, the simulator, and the classifier. `api/main.py` defines the routes, and `api/static/` holds the interface.

C. Implementation Stack

The benchmarks in this report ran on Python 3.13.17 with PyTorch 2.14.1+cu130 [11], scikit-learn 1.9.1 [12], SciPy 1.18.1 [13], FastAPI 0.162.0, and Uvicorn 0.54.0, on a CPU-only machine. These versions describe the measured environment. The project declares only lower bounds, so a reproduction should record the versions it actually resolves.

D. Interface

The interface is a single static page with no build step. The MRI tab offers an upload zone, labelled samples, a draggable comparison slider between scan and attribution, per-stage probabilities, and the attention audit. The handwriting tab offers a drawing canvas, replay of simulated drawings, a speed-coloured trace, and a feature-contribution chart. Its theme follows a shadcn/ui preset [14] (mauve tokens, small radius, Noto Sans body text, Playfair Display headings) with locally served fonts, and a looping video behind translucent panels is disabled when the viewer requests reduced motion.

IV. Data and Preprocessing

A. Synthetic Cohort

The generator draws axial phantoms whose ventricle size, cortical thickness, and hippocampal scale change with stage, together with a clinical table of age, MMSE, CDR, ADAS-Cog, hippocampal volume, APOE4 status, and CSF amyloid. Table I lists the stage profile; the cohort shares give a class imbalance of about 3.2 to 1. Requesting 120 slices for the largest class gives 285 slices (NC 120, EMCI 74, LMCI 54, AD 37), the cohort on which the released checkpoint

TABLE I
PHANTOM GENERATOR PROFILE BY STAGE (DERIVED FROM CODE CONSTANTS)

Stage	Ventricle scale	Cortex thickness	Hippocampus
NC	0.16	0.085	1.00
EMCI	0.21	0.072	0.90
LMCI	0.27	0.058	0.78
AD	0.35	0.044	0.62

was trained, and requesting 150 gives 355 (150, 92, 67, 46). Missingness is highest in CSF amyloid and rises with stage.

B. Hot-Deck Imputation

The imputer fits on complete training records. For a record with missing entries it standardizes the observed columns, finds the k nearest complete donors by Euclidean distance on those columns, and copies the missing values from one donor chosen uniformly among them. Choosing among $k = 5$ donors, not always the nearest, stops one donor from being copied into many recipients and collapsing the imputed variance. In training the pool is restricted to the record's own class, so an AD record never inherits a healthy control's hippocampal volume; at inference the label is unavailable and the global pool is used. A class with fewer than k complete records also falls back to the global pool.

C. ADASYN

Let m_l and m_s be the majority and minority class counts. For each minority point x_i, the implementation counts Δ_i of its K nearest neighbours in the full set that belong to another class, and sets

$$r_i = \frac{\Delta_i}{K}, \qquad \hat{r}_i = \frac{r_i}{\sum_j r_j}, \qquad g_i = \hat{r}_i \, G, \tag{1}$$

with $G = (m_l - m_s)\beta$ synthetic samples to allocate across the class (largest-remainder rounding). Each synthetic point is $s = x_i + \lambda(x_{z_i} - x_i)$ with $\lambda \sim U(0, 1)$ and x_{z_i} a same-class neighbour. The original method counts majority-class neighbours [10]; this implementation counts neighbours of any other class, which coincides for two classes and is a reasonable generalization for four. A class with a single member is skipped. The setting $\beta = 1$ balances every minority class to the majority count.

D. Splits and Leakage Controls

The image manifest is split into stratified 70/15/15 train, validation, and test partitions with seed 42. In the tabular stage the split precedes imputation, the imputer is fitted on training rows only, held-out rows are imputed but never resampled, and ADASYN is applied to the imputed training rows alone. Resampling a held-out partition would score the model against synthetic rows it has effectively seen. The split is by slice. The generator emits one slice per subject, so this equals a subject-level split here, but real data with several slices per subject would leak identity across partitions unless grouped by subject.

V. MODEL AND TRAINING

A. Architecture

The network is torchvision's VGG19 with every in-place ReLU replaced by an out-of-place one, because in-place activations overwrite the values Grad-CAM must read. The 1000-way ImageNet classifier is replaced by $25088 \to 512 \to 256 \to 4$ with dropout 0.5 and 0.25. All convolutional layers are frozen except the last block. The loaded model has 33.0 M parameters, of which 22.4 M are trainable under that freezing rule. Inputs are resized to 224×224 and normalized with ImageNet statistics.

B. Training Procedure

The recipe uses AdamW with learning rate 10^{-4} for the backbone and ten times that for the new head, weight decay 10^{-4}, label smoothing 0.05, cosine decay over at most 25 epochs, and inverse-frequency class weights in the loss. Augmentation is deliberately mild (horizontal flip with probability 0.5, rotation up to 7°, translation up to 3%, and 10% brightness and contrast jitter), because slices are already registered and strong warping removes the atrophy cues. The checkpoint with the best validation macro F1 is kept, with early stopping after six epochs without gain.

C. Checkpoint Under Test

This report did not retrain the network. It evaluates the checkpoint released by the repository authors, whose metadata record the class list, a hidden width of 512, dropout 0.5, one trainable block, the first selected epoch, and a validation macro F1 of 1.000. Selecting the first epoch at a validation score of 1.0 shows that the validation partition (43 slices) is saturated: every later epoch could at best tie, so model selection on it carries no information. This is a property of the synthetic data and is discussed in Section XII.

VI. EXPLANATION AND ATTENTION AUDIT

For class c, Grad-CAM weights each feature map A^k of the target layer by the spatially averaged gradient of the class score y^c and keeps the positive part,

$$\alpha_k^c = \frac{1}{Z} \sum_{u,v} \frac{\partial y^c}{\partial A_{uv}^k}, \qquad L^c = \mathrm{ReLU}\Big(\sum_k \alpha_k^c A^k \Big). \tag{2}$$

The target layer is `features.35`, the activation after the last convolution. Pointing at the preceding convolution output feeds the method values that swing negative, and the final ReLU then flattens every map to zero, a silent failure that a regression test pins. The 14×14 map is upsampled to 224×224 and min-max normalized, with a dead map returned as zeros. A request may ask for any class, which supports the counterfactual question of what would have made a scan read as AD.

The attention audit summarizes where the map falls. With L normalized to $[0, 1]$, the central share is

$$S = \frac{\sum_{(u,v) \in \mathcal{C}} L_{uv}}{\sum_{u,v} L_{uv}}, \tag{3}$$

TABLE II
HANDWRITING FEATURES

Feature	Definition
Drawing time	First to last timestamp (s)
Mean speed	Path length divided by pen-down time (D/s)
Speed variability	Standard deviation of speed over its mean
Stalled time	Share of pen-down samples with 5 Hz speed below $0.05\,D$/s
Pen-up time	Share of the task with the pen lifted
Speed peaks	Peaks of 5 Hz speed per unit path (D), prominence $0.15\times$ median
Tremor	RMS of 4–12 Hz position oscillation (‰ of D)
Spiral irregularity	Radial residual about a cubic fit, relative to mean radius
Drawing size	Bounding-box diagonal over D

TABLE III
SIMULATOR DEPENDENCE ON SEVERITY s (DERIVED FROM CODE CONSTANTS)

Quantity	Value
Mean speed	$0.35\,e^{\mathcal{N}(0,0.25^2)}(1-0.35s)$ D/s
Speed modulation	$\sigma = 0.10 + 0.50s$
Stall events	Poisson, rate $0.2 + 4s$; 0.25–0.8 s each
Pen lifts	Poisson, rate $0.15 + 3s^2$; gap $U(0.3, 1.2)(1+s)$ s
Tremor amplitude	$D(4\times10^{-4} + 1.8\times10^{-3}\,s\,u)$, $u \sim U(0.3, 1.3)$, 4.5–8 Hz
Radial wobble	$(0.012 + 0.05\,s\,u)R$, $u \sim U(0.5, 1.5)$
Size factor	$(1 - 0.35\,s\,u)\,U(0.85, 1.15)$, $u \sim U(0.5, 1.2)$

where $\mathcal{C}$ is the central half of the frame in each dimension. The interface flags a prediction as unverified when $S < 0.40$. The audit assumes registered slices, so that tissue is central and corners are background or acquisition artefact. It is a coarse check for a degenerate explanation, and it is not evidence that the model attends to anatomy.

VII. HANDWRITING MODULE

A. Capture and Task

The person draws an outward spiral starting at a marked centre. The canvas records each pointer sample as (x, y, t) in logical 720×520 coordinates with the browser's millisecond timestamp, uses coalesced pointer events to recover samples merged within a display frame, and starts a new stroke on each pen lift. A mouse or finger supplies no pressure or pen-in-air trajectory, so those measurements reported for tablets [7], [8] are unavailable.

B. Kinematic Features

Each stroke is resampled to 100 Hz. All lengths are expressed relative to the canvas diagonal D, so the features do not depend on screen size, which a test confirms. Pen speed is $v_t = f_s\|p_{t+1} - p_t\|/D$ after a five-sample moving average. Table II defines the nine features. Tremor uses a fourth-order zero-phase Butterworth band-pass from 4 to 12 Hz applied to $x(t)$ and $y(t)$ [13], and strokes under 60 samples are skipped. Peaks and stalls are measured on a 5 Hz low-passed speed so that tremor and pointer quantization do not register as hesitation. Spiral irregularity places the origin at the first point, regresses radius on the normalized unwrapped angle with a cubic polynomial, and reports the residual standard deviation divided by the mean radius.

C. Classifier and Explanation

Five right-skewed features (time, speed, peaks, tremor, irregularity) are log-transformed, then standardized to z_j, and a logistic regression with inverse-frequency class weights and $C = 0.03$ gives

$$P = \sigma\Big(b + \sum_j w_j z_j\Big), \qquad c_j = w_j z_j. \tag{4}$$

The contributions c_j sum, with the intercept, exactly to the model's logit, and a test verifies that they reproduce the reported probability. The interface shows them as a diverging bar chart. The indicator is Low below 0.35, Moderate from 0.35 to 0.65, and High above. The strong regularization keeps probabilities from saturating at 0 and 1, which looked overconfident in the interface.

D. Simulator

No handwriting cohort ships with the repository, so the classifier trains on simulated spirals. A latent severity $s \in [0, 1]$ is drawn per subject, from $\mathcal{N}(0.15, 0.12^2)$ for the typical group and $\mathcal{N}(0.60, 0.20^2)$ for the impaired group, clipped to the unit interval, so the two groups overlap. Table III lists how severity enters. The simulator encodes the direction of changes reported in the literature, namely slower and more variable motion, more stalls and pen lifts, more tremor, and a smaller and wobblier spiral, and it does not encode their size. Each subject also has an independent baseline speed, size, tremor frequency, sampling rate (60 to 125 Hz with timing jitter), and integer pixel coordinates. A classifier trained on this simulator can learn only what the simulator contains.

VIII. SERVING INTERFACE AND API

A. Endpoints and Limits

`POST /predict` and `POST /explain` accept a multipart image, with a limit of 20 MiB (20,971,520 bytes) and a typed error for empty or undecodable uploads. `/explain` takes an optional target class. `POST /handwriting/analyze` accepts JSON strokes and rejects more than 60 strokes or 30,000 points with status 413, and a trace too short to measure with status 422. `GET /handwriting/demo/{profile}` returns a simulated drawing for replay. `/health` reports whether a checkpoint is loaded, and an unavailable model returns 503 instead of crashing the service at start-up, which in an orchestrator would look identical to an untrained one. The MRI model loads when the application starts; the handwriting model loads on first use and, if no saved file exists, trains in a few seconds (Section X).

B. Combined View

When an MRI result exists in the same browser session, the handwriting tab displays

$$p_{\mathrm{comb}} = \tfrac{1}{2}\big(p_{\mathrm{MRI}} + p_{\mathrm{HW}}\big), \tag{5}$$

where p_{MRI} is the probability of any impaired stage and p_{HW} is the handwriting indicator. The weights are not learned. No dataset pairs both signals for the same subjects, so a learned fusion cannot be fitted, and Eq. (5) is a display convenience, not a multimodal model.

IX. Evaluation Methodology

A. Evidence Classes

Results labelled measured were produced by executing the repository at the cited revision. Quantities labelled derived follow from code constants without running anything. Nothing else is claimed. Every experiment fixes its random seeds, and the scripts that produced the tables are deterministic given the seeds and library versions.

B. Environment

All timings and measurements ran on 4 virtual CPU cores of an Intel Xeon at 2.1 GHz with 16 GB of memory, without a GPU, using 4 PyTorch threads. Latency experiments ran with no other load, after a warm-up, over a stated number of repetitions that cycle through the samples, and report the median with the 5th and 95th percentiles. HTTP figures use a real Uvicorn process and loopback requests, and concurrency figures use client threads against its single worker.

C. Cohorts and Seeds

Three cohorts are used for the image model. The first regenerates the repository authors' cohort (seed 42, 285 slices) and applies their split, which recovers their test partition of 43 slices. The second consists of three cohorts of 355 slices from generator seeds 101, 102, and 103, never used in training the checkpoint (1,065 slices in total). These test generalization across fresh draws of the same generator. They do not test distribution shift, because the generator is unchanged. The third is a set of perturbations of the seed-101 cohort. For the handwriting model, training uses 300 drawings per class with seed 0 and evaluation uses 300 per class with seed 999.

D. Metrics

Macro F1 is the unweighted mean of per-class F1, and balanced accuracy is the mean of per-class recall. Quadratic-weighted kappa is

$$\kappa_w = 1 - \frac{\sum_{i,j} w_{ij} O_{ij}}{\sum_{i,j} w_{ij} E_{ij}}, \qquad w_{ij} = \frac{(i-j)^2}{(K-1)^2}, \tag{6}$$

with O the observed and E the chance-expected confusion counts, so that distant stage errors cost more [3]. Early-detection recall is the fraction of EMCI, LMCI, and AD slices not predicted NC. Calibration uses the expected calibration error over 15 equal-width confidence bins [15],

$$\mathrm{ECE} = \sum_{b} \frac{|B_b|}{n} \,\big|\, \mathrm{acc}(B_b) - \mathrm{conf}(B_b) \,\big|, \tag{7}$$

together with negative log-likelihood and the multi-class Brier score. Confidence intervals are 95% percentile intervals from 2,000 bootstrap resamples of slices (500 for the per-seed rows) [16]. A resampled set with a single class is discarded.

TABLE IV
Image Classifier Metrics (Measured, Released Checkpoint)

Metric	Reported split	Fresh cohorts, pooled [95% CI]
Accuracy	0.953	0.978 [0.969, 0.987]
Balanced accuracy	0.965	0.979 [0.971, 0.987]
Macro F1	0.965	0.978 [0.968, 0.986]
Quadratic kappa	0.978	0.990 [0.986, 0.994]
Early-detection recall	0.960	0.992 [0.984, 0.998]
Macro AUC (one-vs-rest)	0.995	0.998
ECE (15 bins)	0.104	0.060
NLL	0.169	0.122
Brier score	0.084	0.051
Slices	43	1,065

X. Results

Every table in this section is measured unless it says otherwise, and each number is produced by the scripts described in Section IX from the stated seeds.

A. Reproduction of the Reported Split

Following the authors' recipe (seed 42, 285 slices, 70/15/15) yields a test partition of 43 slices. The released checkpoint scores accuracy 0.9535, macro F1 0.9653, quadratic kappa 0.9783, and early-detection recall 0.960 (1 of 25 impaired slices called normal), and its confusion matrix is identical to the one printed in the repository documentation. The documented result is therefore reproducible from the released artifacts. It rests on 43 slices, however, and the 95% interval for accuracy is 0.884–1.000, so this single split cannot distinguish a good model from an excellent one.

B. Fresh Cohorts

Table IV compares that split with the 1,065 slices of three fresh cohorts, and Table V gives the pooled confusion matrix. The pooled accuracy is 0.978 (0.969–0.987) and macro F1 is 0.978 (0.968–0.986), with quadratic kappa 0.990 and one-vs-rest macro AUC 0.998. Accuracy for the three seeds is 0.986, 0.975, and 0.975, and macro F1 is 0.987, 0.975, and 0.971. The interval is far tighter than for the 43-slice split and lies above its accuracy, so the reported figure is a small-sample estimate and not a favourable outlier.

All 23 errors are between adjacent stages (23 of them), and 0 span two or more stages. EMCI is the weakest class, with recall 0.931; 14 EMCI slices are read as LMCI, which lowers LMCI precision to 0.931. Early-detection recall is 0.992: 5 of 615 impaired slices are called normal, 5 of them EMCI.

TABLE V
POOLED CONFUSION MATRIX ON FRESH COHORTS (MEASURED; ROWS ARE TRUE STAGE)

True	NC	EMCI	LMCI	AD	Prec.	Recall	F1
NC	447	3	0	0	0.989	0.993	0.991
EMCI	5	257	14	0	0.989	0.931	0.959
LMCI	0	0	201	0	0.931	1.000	0.964
AD	0	0	1	137	1.000	0.993	0.996

TABLE VI
IMAGE ROBUSTNESS ON THE SEED-101 COHORT (MEASURED; 355 SLICES)

Perturbation	Macro F1	Accuracy	Early recall
None (clean)	0.987	0.986	0.995
Gaussian noise, $\sigma = 0.05$	0.919	0.918	1.000
Gaussian noise, $\sigma = 0.10$	0.648	0.665	1.000
Gaussian noise, $\sigma = 0.20$	0.443	0.417	1.000
Gaussian blur, $\sigma = 2$ px	0.822	0.842	0.976
JPEG, quality 30	0.807	0.831	0.922
Brightness $+0.2$	0.942	0.932	0.888
Contrast $\times 0.6$	0.947	0.938	0.898
Rotation 10°	0.965	0.969	0.980
Shift 20 px	0.968	0.969	0.995

C. Calibration

Confidence is informative but not calibrated, and the error runs opposite to the usual direction. On the seed-101 cohort the accuracy is 0.986 while the mean confidence is 0.918 (median 0.945), so the model is underconfident. Mean confidence is 0.92 on correct predictions and 0.73 on wrong ones, so a confidence threshold would separate many errors. The pooled expected calibration error is 0.060, negative log-likelihood 0.122, and Brier score 0.051 (Table IV); the reported split gives an ECE of 0.104. The cause of the underconfidence was not investigated.

D. Robustness to Image Degradation

The checkpoint was trained on clean phantoms and is sensitive to degradation (Table VI). Gaussian noise of standard deviation 0.05 on the unit intensity scale lowers macro F1 from 0.987 to 0.919, noise of 0.10 lowers it to 0.648, and noise of 0.20 to 0.443. Under noise the early-detection recall stays at 1.000 or above, so the errors are of the safer kind, in which normal slices are called impaired. Blur and JPEG compression reduce macro F1 to 0.822 and 0.807. A brightness shift of $+0.2$ and a contrast reduction to 0.6 change macro F1 less (0.942 and 0.947) but lower early-detection recall to 0.888 and 0.898, which is the more costly direction because impaired slices are read as normal. A 10° rotation and a 20 px shift are tolerated (0.965 and 0.968). The pattern is consistent with a model that relies on intensity cues present in clean phantoms, and it shows that accuracy on clean data says little about acquisitions that differ in noise, contrast, or compression.

E. Attention Audit

Grad-CAM maps for the predicted class were computed for 710 slices from seeds 101 and 102. The central share has mean 0.775, median 0.701, 5th percentile 0.645, and minimum 0.587, so no map falls below the 0.40 flag threshold (0 flagged). The audit never triggered on this data. It also does not separate correct from incorrect predictions: the mean central share is 0.774 for correct predictions and 0.826 for the 14 wrong ones (2.0%). On clean phantoms, whose anatomy is centred by construction, the audit is a valid but uninformative sanity check. Whether it would detect attention to artefacts under distribution shift was not tested.

TABLE VII
IMPUTATION OF HIDDEN CELLS, 30 REPEATS (MEASURED)

Method	nRMSE	Variance ratio	AD bias (sd)
Column mean	1.000	0.00	+1.47
Class mean (uses true label)	0.649	0.57	−0.05
KNN imputer, $k = 5$	0.846	0.50	+0.34
Hot−deck, $k = 1$, class pool	0.902	1.03	−0.01
Hot−deck, $k = 5$, class pool	0.920	1.04	−0.05
Hot−deck, $k = 5$, global pool	1.017	1.01	+0.10

F. Imputation Against Baselines

Imputation was tested where the truth is known. A complete table of 950 synthetic records was split 70/30, the imputer was fitted on the training part, and 20% of the held-out cells were hidden at random, keeping at least one observed value per record, for 30 seeds. Six continuous columns were scored (APOE4 is binary). Table VII reports the root-mean-square error over the training standard deviation (nRMSE), the ratio of the variance of imputed to true values, and the mean error of imputed hippocampal volume for AD records in standard deviations.

Mean imputation has nRMSE 1 by construction and a variance ratio of zero, because every filled cell receives the same number, and it fills AD records with a volume that is on average 1.47 standard deviations too large. The class mean, which needs the true label, has the lowest point error but still shrinks the variance to 0.57. Hot-deck imputation with a class-restricted pool of five donors retains the spread of the data (variance ratio 1.04) and removes the stage bias (-0.05 standard deviations), at the cost of a larger per-cell error than the class mean or the KNN imputer, since each donor adds its own noise. The result supports the repository's claim about variance and bias and qualifies it: hot-deck imputation is preferable when later steps depend on the distribution of the data, and worse when the only goal is to minimize error per cell. The class-restricted pool needs the label and so applies only to training data; with the global pool that inference must use, nRMSE is 1.017, no better than the mean, although variance is preserved.

G. Effect of Balancing

The balancing stage was tested downstream in the repository's own order. A 950-row synthetic clinical table with 13.7% missing cells and an imbalance of 3.26 to 1 was split 70/30 for 30 repeats. Each training part was imputed with a class-restricted hot-deck imputer, resampled with a strategy

TABLE VIII
DOWNSTREAM EFFECT OF BALANCING, 30 SPLITS (MEASURED; MEAN ± SD)

Strategy	Macro F1	AD recall	LMCI recall
No resampling	0.854 ± 0.021	0.888	0.683
Class-weighted loss	0.854 ± 0.020	0.906	0.702
Random oversampling	0.856 ± 0.020	0.905	0.706
ADASYN, $\beta = 1$	0.852 ± 0.021	0.891	0.704

TABLE IX
HANDWRITING CLASSIFIER ON SIMULATED DRAWINGS (MEASURED)

Model	Acc.	Sens.	Spec.	AUC
Majority class	0.500	–	–	0.500
Best single feature	–	–	–	0.939
Gradient boosting	0.882	–	–	0.955
Logistic reg., 5-fold CV	0.923	0.910	0.937	0.975
Logistic reg., held out	0.893	0.890	0.897	0.962

from Table VIII, and used to fit a standardized multinomial logistic regression, scored on the untouched held-out part imputed without labels.

The mechanical effect is exact: on one training split ADASYN adds 455 synthetic rows and brings the imbalance from 3.26 to 1.00. The downstream effect is not measurable. All four strategies score between 0.852 and 0.856 macro F1 with standard deviations near 0.02, and the paired difference between ADASYN and no resampling is -0.002 ± 0.015, with ADASYN ahead in 14 of 30 splits. LMCI recall rises slightly for every balancing strategy, but by less than its standard deviation. A benefit may appear with a more severe imbalance, a nonlinear classifier, or real data, but none was tested. On this evidence ADASYN is correctly implemented but its benefit is not demonstrated.

H. Handwriting Classifier

The classifier was trained on 600 simulated drawings and scored on 600 drawings from a different seed, 300 per class. Table IX reports accuracy 0.893 (95% interval 0.868–0.918), sensitivity 0.890, specificity 0.897, and AUC 0.962 (0.946–0.975). The cross-validated accuracy stored with the model, 0.923, lies slightly above the interval of the fresh estimate, so the held-out figure is the one to prefer. Gradient boosting on the same features does not improve on the linear model (accuracy 0.882, AUC 0.955), so interpretability costs nothing here. The best single feature, spiral irregularity, reaches AUC 0.939 alone.

Among typical drawings 81% fall in the Low tier and 3% in the High tier; among impaired drawings 82% are High and 6% Low, and 14% of all drawings fall in the Moderate band. The indicator's Spearman correlation with the latent severity is 0.969.

Table X relates the weights to a drop-one ablation in which the model is retrained without each feature. Removing any single feature changes held-out AUC by at most 0.004, with the largest effect for tremor. The measurements are largely redundant because the simulator ties all of them to one latent severity, so the weights decompose one prediction and do not rank causal importance.

TABLE X
HANDWRITING FEATURES: WEIGHT, SINGLE-FEATURE AUC, AND AUC WITHOUT THE FEATURE (MEASURED)

Feature	Weight	Alone	Dropped
Tremor	+0.71	0.890	0.958
Spiral irregularity	+0.66	0.939	0.962
Speed variability	+0.63	0.890	0.960
Speed peaks	+0.49	0.905	0.960
Drawing time	+0.34	0.849	0.962
Drawing size	−0.26	0.779	0.960
Pen-up time	+0.22	0.765	0.961
Mean speed	−0.21	0.824	0.962
Stalled time	−0.15	0.597	0.960

TABLE XI
HANDWRITING ROBUSTNESS ON 600 HELD-OUT DRAWINGS (MEASURED; MODEL FIXED)

Input degradation	Accuracy	AUC
None (clean)	0.893	0.962
Every 2nd sample kept	0.892	0.961
Every 4th sample kept	0.888	0.961
Position noise 0.5 px	0.902	0.961
Position noise 1 px	0.888	0.959
Position noise 2 px	0.862	0.950
Position noise 4 px	0.648	0.928
Timestamp jitter 2 ms	0.890	0.961
Timestamp jitter 5 ms	0.887	0.962
Drawing cut at 75%	0.883	0.960
Drawing cut at 50%	0.890	0.956

Table XI degrades the held-out drawings while the model stays fixed. Keeping a quarter of the samples, jittering timestamps by up to 5 ms, and cutting the drawing at half its length leave accuracy within a few points of the clean value and AUC above 0.95. Position noise behaves differently, because tremor is measured as oscillation of position and added noise raises it for every drawing. Accuracy falls from 0.893 to 0.862 at 2 px and to 0.648 at 4 px, while AUC falls only to 0.928. The ranking is largely preserved but the threshold of 0.5 is not, so a noisier device such as a touch screen would require recalibration; the 4 px level was not measured on real devices. Feature values at a coordinate scale of 1.7 differ from the unscaled values by at most 6.8×10^{-14} in relative terms, confirming scale invariance at a factor that is not a power of two.

I. Latency, Throughput, and Resources

Table XII reports latency on an otherwise idle machine. Preprocessing is negligible at 0.28 ms. A prediction takes 111 ms at the median (95th percentile 150 ms) and an explained prediction 293 ms (344 ms), which is 2.6 times as long because Grad-CAM adds a backward pass. Over HTTP the medians are 123 ms and 294 ms, so the protocol adds about 12 ms to a prediction and 1 ms to an explanation, including decoding the 32.6 kB upload. Scoring a drawing of about 982 points

TABLE XII
LATENCY ON 4 CPU CORES, IDLE MACHINE (MEASURED; MILLISECONDS)

Operation	Median	5th–95th pct.	n
Preprocessing (resize, normalize)	0.28	0.23–0.53	100
`predict()`	111	93.7–150	100
`explain()` (Grad-CAM)	293	241–344	50
HTTP `/health`	2.17	1.83–2.83	100
HTTP `/predict`	123	99.4–180	50
HTTP `/explain`	294	247–390	30
Handwriting: extract features	6.47	3.59–12.4	200
Handwriting: features + score	10.0	5.99–16.5	200
HTTP `/handwriting/analyze`	11.8	9.94–15.9	50
Simulate one drawing	3.47	2.84–4.15	50

TABLE XIII
SIZE, MEMORY, AND THROUGHPUT (MEASURED)

Quantity	Value
Checkpoint file	132 MB
Parameters, total	33.0 M
Model load time	1.7 s
Server cold start to ready	11.6 s
Server process resident memory after the benchmark	1,183 MiB
Forward throughput, batch 1	9.1 img/s
Forward throughput, batch 16	7.5 img/s
`/predict` throughput, 1 / 2 / 4 clients	9.4 / 9.2 / 9.4 req/s
`/explain` throughput, 1 / 2 / 4 clients	3.61 / 3.26 / 3.54 req/s

takes 10.0 ms, of which feature extraction is 6.47 ms, and the HTTP round trip with a 21.9 kB body takes 11.8 ms. If no saved handwriting model exists, the service trains one in 5.7 s; with a saved file it loads in 1.75 ms.

Table XIII gives size and throughput. The checkpoint is 132 MB. This agrees with a derived value: 33.0 M float32 parameters occupy 132,009,232 bytes, and the file is only 14 kB larger, which is metadata. Loading it adds 138 MiB to the process, and after explanations the process is 319 MiB above its starting size, while the whole server process holds 1,183 MiB after the benchmark. The server takes 11.6 s from launch until the model is ready. Larger batches do not help on four CPU cores.

Concurrent clients do not raise throughput. With one, two, and four clients the service sustains about 9.4 predictions per second and about 3.6 explanations per second, the same as a single client, because each request runs a blocking forward pass in a single worker. On this hardware the capacity of one worker is therefore about 9.4 predictions or 3.6 explanations per second, and serving more users requires more workers or a GPU. The interface assets total 1,665 kB, of which the two background videos are 766 kB (MP4) and 710 kB (WebM). A browser downloads only one, so a first visit transfers about 182 kB plus one video (derived from file sizes, not a measured page load).

XI. VERIFICATION STATUS AND SOFTWARE SIZE

The repository contains 88 test functions in five files, and the full suite passes in 42 s on the benchmark machine. Table XIV

TABLE XIV
VERIFICATION STATUS AND PROPOSED EXTENSIONS

Area	Existing tests (count)	Useful extension
Imputation	Donor values are real, variance beats mean imputation, labels respected (10)	Bias under non-random missingness
ADASYN	Exact balance, interpolation within the minority hull, adaptive allocation (12)	Downstream-effect test on real data
Model and Grad-CAM	Shapes, freezing, checkpoint round trip, hooks, dead-map and wrong-layer cases (25)	Faithfulness (deletion and insertion) tests
Pipeline and API	Splits, transforms, weights, health, upload errors, path traversal (24)	End-to-end `/predict` with a checkpoint
Handwriting	Tremor, pace, pen-up time, scale invariance, logit decomposition, API limits (17)	Real tablet recordings
Interface	None committed	Automated browser tests

relates them to the claims in this report. Their passing establishes intended behaviour at component boundaries and is not a coverage measurement. They do not exercise the training loop, a real checkpoint through the API, or the browser interface, which were checked here by the benchmarks and by scripted browser runs that are not committed. The source totals 2,625 non-blank Python lines, 684 lines of tests, 1,310 of scripts, and 1,433 of interface markup, style, and script.

XII. LIMITATIONS AND THREATS TO VALIDITY

A. Synthetic Data and Circularity

The MRI phantoms encode stage as a clean geometric change in ventricle size, cortical thickness, and hippocampal scale, so near-perfect scores are what a correct pipeline should produce, and anything lower would indicate a defect. The validation partition is saturated: the selected checkpoint reached a validation macro F1 of 1.000 at its first epoch. The handwriting classifier is circular in the same way. It learns the directions encoded in the simulator and is then scored on drawings from that simulator. The Spearman correlation of 0.969 between its output and the latent severity measures how faithfully it recovers a variable the generator made monotone, not how well it detects disease. None of the accuracy figures should be quoted as clinical performance.

B. Scope of the Evaluation

The fresh cohorts test generalization across new draws of an unchanged generator. They do not test distribution shift, a different scanner, or a different population. The perturbation study (Table VI) shows the checkpoint is sensitive to image degradation that the clean phantoms never contain. Only one released checkpoint was evaluated, and training was not repeated, so the intervals reflect resampling of test slices and not training randomness. Splits are by slice, which equals

subject-level splitting only because the generator emits one slice per subject.

C. Calibration and Explanation

Even the small calibration error of 0.060 does not make the confidence a probability of disease. The attention audit detects a degenerate map and does not show that the map is faithful to the model's computation; no deletion or insertion test was run, and a 14×14 map upsampled to 224×224 localizes to a region and not to a structure.

D. Handwriting Capture

A mouse or finger provides neither pressure nor in-air movement, and typical computer users differ greatly in pointing skill. Age, handedness, and familiarity with the device would confound any real study. The noise experiment shows the fixed decision threshold of 0.5 is not portable across input devices, even where the ranking of drawings is preserved.

E. Combined Indicator and Operation

The combined indicator is an unweighted average and is not a trained multimodal model. The service has no authentication, persistence, or audit trail, runs one worker, and accepts uploads up to the stated limits. The Docker files were not built in this evaluation. The system is a research prototype and not a medical device.

XIII. Improvement Priorities

The first priority is real data with subject-level grouping: ADNI imaging for the MRI branch and a tablet handwriting set such as DARWIN [8] for the second, with external validation on a site not used in training. Every figure in this report would then be replaced, and the simulator would remain only as a test fixture. The second is calibration and decision thresholds: temperature scaling [15] on a validation partition, then a threshold chosen for the cost of a missed impairment, and a per-device noise floor for the handwriting tremor feature.

The third is robustness. Noise, blur, and compression augmentation, followed by re-running the perturbation study, would address the sensitivity measured here. The fourth is explanation faithfulness: deletion and insertion curves and a finer attribution method. The fifth is a learned fusion, which requires paired recordings from the same subjects. The sixth is engineering: committed browser tests, continuous integration, pinned dependency versions, bounded worker concurrency for the explanation route, and, if patient data were ever handled, authentication and an audit log. This ordering ties each improvement to a verified baseline and prevents a better score on synthetic data from obscuring a lack of clinical evidence.

XIV. Conclusion

The prototype implements an explainable, two-modality pipeline in a small and readable layered application. Executing the released checkpoint reproduces the authors' reported test figures exactly and generalizes to fresh draws of the generator (accuracy 0.978, macro F1 0.978), but it degrades sharply under image noise and blur, so its scores describe the pipeline and the generator. The handwriting module adds an interpretable second signal whose explanation is exact, and its ranking is robust to sampling rate, timing jitter, and truncation, but its threshold is not robust to coordinate noise. Hot-deck imputation preserves variance as claimed, while the benefit claimed for ADASYN is not observed downstream on the synthetic table. A CPU-only service answers a prediction in about 111 ms and an explained prediction in about 293 ms.

The most valuable next steps are real data with subject-level splits, calibration and threshold selection, robustness training, and faithfulness tests for the explanations. With these, the prototype can become a stronger experimental platform for studying explainable early detection while retaining the clarity of its present design.

References

[1] Harit Raval and Malhar Srivatsav, "Early detection of Alzheimer's: VGG19 transfer learning with Grad-CAM, hot-deck imputation, ADASYN balancing and a handwriting module," project source repository, revision 492764d, inspected Oct. 26, 2026. [Online]. Available: https://github.com/ByteSizedMe/alzheimers-early-detection

[2] R. C. Petersen, P. S. Aisen, L. A. Beckett, M. C. Donohue, A. C. Gamst, D. J. Harvey, C. R. Jack, Jr., W. J. Jagust, L. M. Shaw, A. W. Toga, J. Q. Trojanowski, and M. W. Weiner, "Alzheimer's Disease Neuroimaging Initiative (ADNI): Clinical characterization," *Neurology*, vol. 74, no. 3, pp. 201–209, 2010.

[3] J. Cohen, "Weighted kappa: Nominal scale agreement with provision for scaled disagreement or partial credit," *Psychol. Bull.*, vol. 70, no. 4, pp. 213–220, 1968.

[4] K. Simonyan and A. Zisserman, "Very deep convolutional networks for large-scale image recognition," in *Proc. Int. Conf. Learn. Represent. (ICLR)*, 2015, arXiv:1409.1556.

[5] J. Deng, W. Dong, R. Socher, L.-J. Li, K. Li, and L. Fei-Fei, "ImageNet: A large-scale hierarchical image database," in *Proc. IEEE Conf. Comput. Vis. Pattern Recognit. (CVPR)*, 2009, pp. 248–255.

[6] R. R. Selvaraju, M. Cogswell, A. Das, R. Vedantam, D. Parikh, and D. Batra, "Grad-CAM: Visual explanations from deep networks via gradient-based localization," in *Proc. IEEE Int. Conf. Comput. Vis. (ICCV)*, 2017, pp. 618–626.

[7] P. Werner, S. Rosenblum, G. Bar-On, J. Heinik, and A. Korczyn, "Handwriting process variables discriminating mild Alzheimer's disease and mild cognitive impairment," *J. Gerontol. B Psychol. Sci. Soc. Sci.*, vol. 61, no. 4, pp. P228–P236, 2006.

[8] N. D. Cilia, G. D. Gregorio, C. D. Stefano, F. Fontanella, A. Marcelli, and A. Parziale, "Diagnosing Alzheimer's disease from on-line handwriting: A novel dataset and performance benchmarking," *Eng. Appl. Artif. Intell.*, vol. 111, p. 104822, 2022.

[9] R. R. Andridge and R. J. A. Little, "A review of hot deck imputation for survey non-response," *Int. Stat. Rev.*, vol. 78, no. 1, pp. 40–64, 2010.

[10] H. He, Y. Bai, E. A. Garcia, and S. Li, "ADASYN: Adaptive synthetic sampling approach for imbalanced learning," in *Proc. IEEE Int. Joint Conf. Neural Netw. (IJCNN)*, 2008, pp. 1322–1328.

[11] A. Paszke *et al.*, "PyTorch: An imperative style, high-performance deep learning library," in *Proc. Adv. Neural Inf. Process. Syst. (NeurIPS)*, vol. 32, 2019.

[12] F. Pedregosa *et al.*, "Scikit-learn: Machine learning in Python," *J. Mach. Learn. Res.*, vol. 12, pp. 2825–2830, 2011.

[13] P. Virtanen *et al.*, "SciPy 1.0: Fundamental algorithms for scientific computing in Python," *Nat. Methods*, vol. 17, pp. 261–272, 2020.

[14] shadcn-ui contributors, "shadcn/ui: Component and theme registry, source repository." Accessed: Oct. 25, 2026. [Online]. Available: https://github.com/shadcn-ui/ui

[15] C. Guo, G. Pleiss, Y. Sun, and K. Q. Weinberger, "On calibration of modern neural networks," in *Proc. 34th Int. Conf. Mach. Learn. (ICML)*, ser. PMLR, vol. 70, 2017, pp. 1321–1330.

[16] B. Efron and R. J. Tibshirani, *An Introduction to the Bootstrap*. New York, NY, USA: Chapman & Hall, 1993.